KIDDE™ COMMERCIAL

1X-F8-MB

Conventional Fire Panel - 8 Zone

1X-F8-MB

Conventional Fire Panel - 8 Zone

Specifiche tecniche

General

Maximum system capacity (device count)	jusqu'à 1280
Network size (nodes)	jusqu’à 8

Electrical

Power supply type	VAC

Loop

Maximum loop capacity	8

Zone

Maximum zone capacity	jusqu’à 8

Input

Input quantity	2

Physical


Form factor	Medium
Colour	Grå (RAL 7035)
Mounting type	I kabinettet

Environmental

Environment	Indendør

Regulatory

Certification	EN54-13, EN54-2, EN54-4

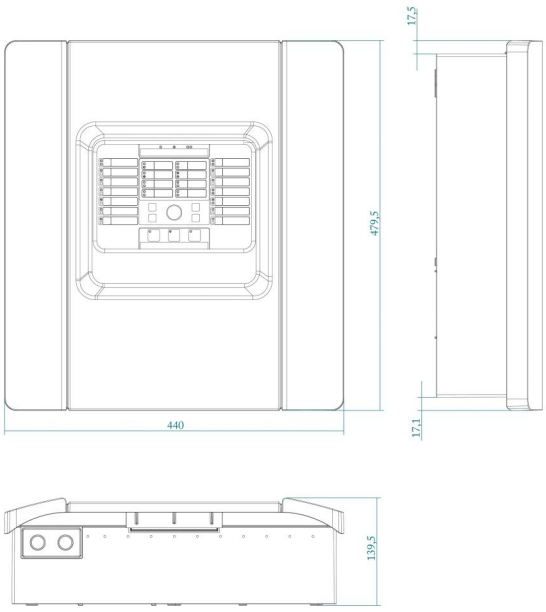

In quanto azienda in continua innovazione, Kidde Global Solutions si riserva il diritto di modificare le specifiche del prodotto senza preavviso. Per avere informazioni sempre aggiornate, visita it.firesecurityproducts.com online o contatta il tuo riferimento commerciale.

Last updated on 12 November 2026 - 18:57