# NS3503-8P-2X

**Switch Gigabit administrable 8 ports, 4× PoE+ (802.3at) et 4× PoE++ (802.3bt), équipé de 2 ports SFP 10Gb/s.**

## High-power PoE for demanding IP devices

The IFS NS3503-8P-2X delivers high-power PoE++ connectivity to support today's power-intensive IP devices. With support for IEEE 802.3bt PoE++ (up to 95 W per port) and a total PoE budget of 240 W, the switch can directly power PTZ cameras, multi-sensor cameras, intercoms, controllers, and other network devices—reducing the need for external power supplies and simplifying installation.

## High-performance networking with 10G uplink connectivity

Equipped with dual 10G SFP+ uplink ports, the NS3503-8P-2X ensures high-bandwidth aggregation and reliable connectivity to NVRs, servers, or centralized core switches. This eliminates network bottlenecks in high-traffic environments and provides a scalable backbone for video-intensive and data-rich applications.

## Designed for professional, reliable installations

The compact, fanless design enables silent operation and flexible deployment in control rooms, technical cabinets, or office environments. Advanced Layer 2+ switching and static Layer 3 routing, combined with multicast support and intelligent PoE monitoring, help deliver stable operation, faster commissioning, and reduced maintenance effort.

## Versatile platform for security and beyond

Optimized for video surveillance, access control, and intrusion systems, the NS3503-8P-2X also supports a wide range of IP-based building applications, including IP intercoms, building automation, digital signage, and AV-over-IP systems. This versatility allows installers and end users to consolidate multiple systems onto a single, professional-grade network platform.




## Détails

- 4x 10/100/1000BASE-T ports with 95W 802.3bt PoE++ injector function (Ports 1 to 4)
- 4x 10/100/1000BASE-T ports with 32W 802.3at PoE+ injector function (Ports 5 to 8)
- 2x 10GBASE-SR/LR SFP+ slots, compatible with 100/1G/2.5G BASE-X SFP transceivers (Ports XG1 to XG2)
- Total PoE power budget of 240 watts
- Layer 2 features and Layer 3 IP routing features
- Intellingent PoE features and PD Alive check
- Fanless mode

# NS3503-8P-2X

## Switch Gigabit administrable 8 ports, 4× PoE+ (802.3at) et 4× PoE++ (802.3bt), équipé de 2 ports SFP 10Gb/s.

## Spécifications techniques

### General

| | |
|---|---|
| Storm control | Broadcast, Multicast, Unicast |
| DHCP snooping | Yes |
| Reset button | <5 sec: System reboot, >5 sec: Factory default |

### Category

| | |
|---|---|
| Category | Commercial |
| Management | Managed |
| Managed | Yes (Layer 3 - Limited) |
| PoE | Yes |

### Physical ports

| | |
|---|---|
| No. of ports | 8 |
| Port type | 10/100/1000BASE-T |
| Speed | Gigabit |
| PoE/PoE+ | 4 ports PoE++ (95W) + 4 ports PoE+ (32W) |
| SFP ports | Two 10GBASE-SR/LR SFP+ interfaces (Port XG1 to Port XG2). Backward compatible with 100/1G/2.5GBASE-SX/LX/BX SFP transceivers |
| Console | 1 x RJ45-to-RS232 serial port (115200, 8, N, 1) |
| Max. number of 95W 802.3bt Type 4 PDs | 2 |
| Max. number of 60W 802.3bt Type 3 PDs | 4 |
| Max. number of 30W 802.3at Type 2 PDs | 8 |

### Switch Performance

| | |
|---|---|
| Switch fabric | 56 Gbps/non-blocking |
| Throughput (Mpps) | 41.66 Mpps@64 bytes |
| Mac table | 16 K |
| Jumbo frame support | 12 K |

### Electrical

| | |
|---|---|
| PoE power budget | 240W max. \| 120W in Fanless mode |
| Redundant power | No |
| Power supply type | 100 to 240 VAC |
| Power consumption | Max. 10.7 watts/36.5BTU (Power on without any connection)<br>Max. 269 watts/917.87BTU (Fully loaded) |
| ESD Protection | Contact Discharge 6KV DC, Air Discharge 8KV DC |

### Physical

| | |
|---|---|
| Physical dimensions | 280 x 230 x 44 mm (1U height) |
| Net weight | 1885 g |
| Colour | Black |
| Material | Metal |
| Mounting type | Desk-based, Rack mount |
| Stackable | No |

### Environmental

| | |
|---|---|
| Operating temperature | 0 to +50°C |
| Storage temperature | -10 to +60°C |
| Relative humidity | 5 to 95% non-condensing |
| Environment | Indoor |

### Regulatory

| | |
|---|---|
| Compliancy | CE, RoHS, UKCA, WEEE |
| Standards | IEEE 802.3 10BASE-T<br>IEEE 802.3u 100BASE-TX/100BASE-FX<br>IEEE 802.3z Gigabit SX/LX<br>IEEE 802.3ab Gigabit 1000BASE-T<br>IEEE 802.3ae 10Gb/s Ethernet<br>IEEE 802.3x Flow Control and Back Pressure<br>IEEE 802.3ad Port Trunk with LACP<br>IEEE 802.1D Spanning Tree Protocol<br>IEEE 802.1w Rapid Spanning Tree Protocol<br>IEEE 802.1s Multiple Spanning Tree Protocol<br>IEEE 802.1p Class of Service<br>IEEE 802.1Q VLAN Tagging<br>IEEE 802.1ab LLDP<br>IEEE 802.3af Power over Ethernet<br>IEEE 802.3at Power over Ethernet Plus<br>IEEE 802.3bt Power over Ethernet Plus Plus<br>IEEE 802.3az for Energy-Efficient Ethernet<br>RFC 768 UDP<br>RFC 783 TFTP<br>RFC 791 IP<br>RFC 792 ICMP<br>RFC 2068 HTTP<br>RFC 1112 IGMP v1<br>RFC 2236 IGMP v2<br>RFC 3376 IGMP v3<br>RFC 2710 MLD v1<br>RFC 3810 MLD v2<br>ITU-T G.8032 ERPS Ring |

### Switch performance

| | |
|---|---|
| Switch architecture | Store-and-Forward |
| Shared data buffer | 12 Mbits |
| Flow control | IEEE 802.3x pause frame for full duplex, Back pressure for half duplex |

### PoE management functions

| | |
|---|---|
| PoE management | System PoE admin mode, Fanless mode, Consumption mode/Allocation mode, Temperature threshold |
| Enhanced PoE mode | Standard/Force |
| Active PoE device live detection | Yes |
| PoE power recycling | Yes, daily or predefined schedule |
| PoE schedule | 4 schedule profiles |
| PoE extended mode | Yes, max. up to 250 meters |

# NS3503-8P-2X

**Switch Gigabit administrable 8 ports, 4× PoE+ (802.3at) et 4× PoE++ (802.3bt), équipé de 2 ports SFP 10Gb/s.**

## Layer 2 functions

| | |
|---|---|
| Port mirroring | TX/RX/Both, Many-to-1 monitor, Up to 4 sessions |
| VLAN | 802.1Q tagged VLAN, 802.1ad Q-in-Q tunneling (VLAN stacking), Protocol VLAN, Private VLAN (Protected port), GVRP, Management VLAN, Up to 256 VLAN groups, out of 4094 VLAN IDs |
| Link aggregation | IEEE 802.3ad LACP and static trunk, Supports 8 groups with 8 ports per trunk |
| Spanning tree protocol | IEEE 802.1D Spanning Tree Protocol (STP), IEEE 802.1w Rapid Spanning Tree Protocol (RSTP), IEEE 802.1s Multiple Spanning Tree Protocol (MSTP), STP BPDU Guard, BPDU Filtering and BPDU Forwarding |
| IGMP snooping | IPv4 IGMP snooping v2/v3, IGMP querier, Up to 256 multicast groups |
| MLD snooping | IPv6 MLD snooping v2, v3, up to 256 multicast groups |
| Access Control List | IPv4/IPv6 IP-based ACL/MAC-based ACL, IPv4/IPv6 IP-based ACE/MAC-based ACE |
| QoS | 8 mapping IDs to 8 level priority queues: Port number \| 802.1p priority \| DSCP/IP precedence of IPv4/IPv6 packets. Traffic classification based, strict priority and WRR. Ingress/Egress Rate Limit per port bandwidth control. |
| Ring | Supports ERPS, and complies with ITU-T G.8032. Recovery time < 450ms |

## Layer 3 functions


| | |
|---|---|
| IP interfaces | Max. 64 VLAN interfaces |
| Routing table | Max. 32 routing entries |
| Routing protocols | IPv4/IPv6 hardware static routing |

## Security functions

| | |
|---|---|
| Access Control List | IPv4/IPv6 IP-based ACL/MAC-based ACL, IPv4/IPv6 IP-based ACE/MAC-based ACE, Max. 256 ACL entries |
| Port security | Built-in RADIUS client to co-operate with RADIUS server, RADIUS/TACACS+ user access authentication |
| MAC security | IP-MAC port binding, MAC filter, Static MAC address, max. 256 static MAC entries |
| Enhanced security | DHCP Snooping and DHCP Option82, STP BPDU guard, BPDU filtering and BPDU forwarding, DoS attack prevention, ARP inspection, IP source guard |

## Management functions

| | |
|---|---|
| Basic management interfaces | RS232 Console, Web browser, Telnet, SNMP v1/v2c |
| Secure management interfaces | SSHv2, TLSv1.2, TLSv1.3, SNMP v3 |
| System management | Firmware upgrade by HTTP/TFTP protocol through Ethernet network, Configuration upload/download through HTTP/TFTP, LLDP protocol, SNTP |
| Event management | Remote/Local Syslog, System log, SMTP Email notification |
| SNMP MIBs | RFC 1213 MIB-II, RFC 1215 Generic Traps, RFC 1493 Bridge MIB, RFC 2674 Bridge MIB Extensions, RFC 2737 Entity MIB (Version 2), RFC 2819 RMON (1, 2, 3, 9), RFC 2863 Interface Group MIB, RFC 3635 Ethernet-like MIB, RFC 3621 Power Ethernet MIB, LLDP MIB |

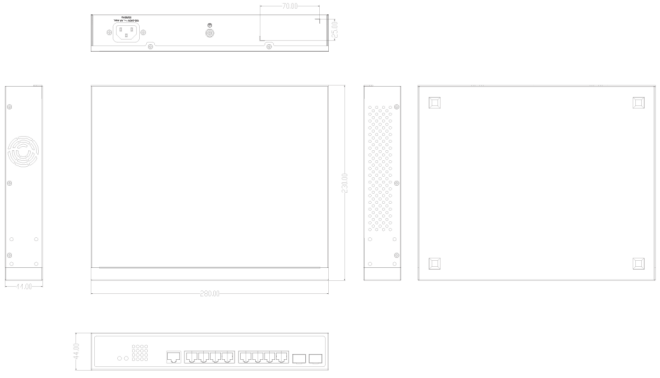

En tant que société d'innovation, Kidde Global Solutions se réserve le droit de modifier les spécifications des produits sans préavis. Pour les dernières spécifications du produit, visitez le site web fr.firesecurityproducts.com ou contactez votre représentant commercial.

Last updated on 12 November 2026 - 20:20