5822A-W

Recessed ShatterPro II with "Pattern Recognition Technology" 360° - 7,5 m radius range.



5822A-W

Recessed ShatterPro II with "Pattern Recognition Technology" 360° - 7,5 m radius range.

Technische specificaties

General

Technology	Acoustic
Glass types	Laminated, Plate, Tempered, Wired
Range	7.5 m radius
Relay output	NC, open 4 sec on alarm
Tamper switch	Yes

Wired/wireless

Wired-wireless	Wired

Electrical

Power supply value	9 to 16 VDC
Current consumption	25 mA 12 mA

Physical

Colour	White
Mounting type	Recessed mount

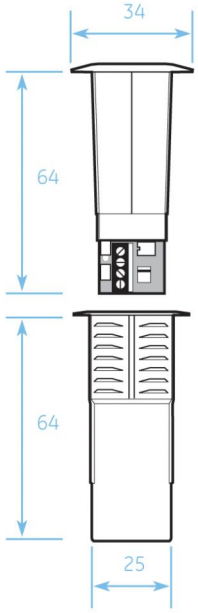

Als een bedrijf van innovatie behoudt Kidde Global Solutions zich het recht voor productspecificaties zonder kennisgeving te wijzigen. Ga voor de nieuwste productspecificaties online naar be.firesecurityproducts.com of neem contact op met uw verkoopvertegenwoordiger.

Last updated on 12 November 2026 - 18:57