# SMA-LP-MULTI

**MA SIGMA Lite Plus - Multi, 2.8 inch QVGA touchscreen, Multi-factor Bio/Card, MIFARE/MIFARE Plus/DESFIRE, IP65, 500 users, CE**



# SMA-LP-MULTI

## MA SIGMA Lite Plus - Multi, 2.8 inch QVGA touchscreen, Multi-factor Bio/Card, MIFARE/MIFARE Plus/DESFIRE, IP65, 500 users, CE

## Spécifications techniques

### System

| | |
|---|---|
| RTE (Request To Exit) | No |
| CSN (Card Serial Number) | Yes |
| Custom data model | Yes |

### Technology

| | |
|---|---|
| Reader type | Biométrico |
| Reader operating-transmitting frequency | 13.56 MHz |
| Supported technology 13.56 MHz | MIFARE Classic (CSN), MIFARE Classic (dados personalizados), MIFARE DESFire (CSN), MIFARE DESFire EV1 (CSN), MIFARE DESFire EV1 (dados personalizados), Mifare DESFire EV2 (CSN), MIFARE Plus (CSN), MIFARE Plus (CSN, level 1 and 3), NFC (CSN) |
| SAM module embedded | No |

### Biometric

| | |
|---|---|
| Biometric type | Impressão Digital |
| Biometric sensor type | Ótico |

### Interface & connections

| | |
|---|---|
| Interface | Ethernet, OSDP V2, OSDP V2 Canal Seguro, RS-485, USB, Wiegand |
| Connector type | Netzwerk, Zopf |

### Tamper type

| | |
|---|---|
| Pry-off tamper | No |
| Opening tamper | Yes |

### Operation

| | |
|---|---|
| Stand-alone | Yes |
| PIN keypad | Yes |

### Electrical

| | |
|---|---|
| Power supply type | PoE-Eingang |

### Physical

| | |
|---|---|
| Colour | Schwarz |
| Material | Polycarbonat |
| Form factor | Überdimensioniert |
| Mounting type | Montagem em superfície |

### Environmental

| | |
|---|---|
| Vandal proof | No |
| Environment | Draussen |

### Regulatory

| | |
|---|---|
| Compliancy | CE, FCC, ICASA, REACH, RoHS, UL 294, WEEE |

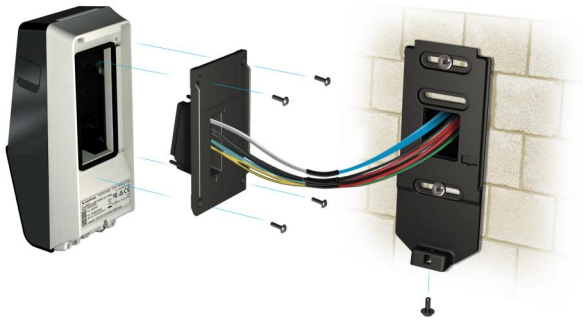

En tant que société d'innovation, Kidde Global Solutions se réserve le droit de modifier les spécifications des produits sans préavis. Pour les dernières spécifications du produit, visitez le site web be.firesecurityproducts.com ou contactez votre représentant commercial.

Last updated on 12 November 2026 - 18:57