
# 2010-2-PIB

## Addressable Fire Panel Accessory - Peripherals Interface Printed Circuit Board

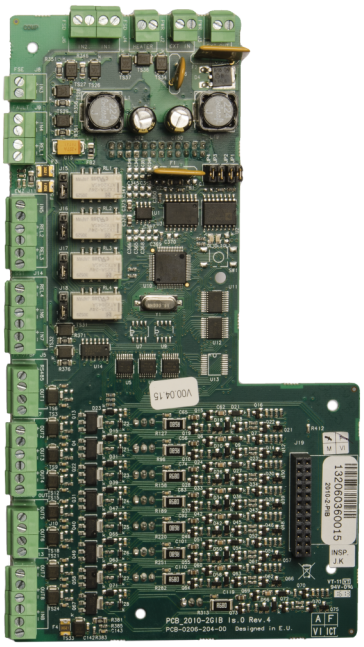

### Details

- 8 supervised inputs

# 2010-2-PIB

## Addressable Fire Panel Accessory - Peripherals Interface Printed Circuit Board

## Technische specificaties

### General

| | |
|---|---|
| Maximum system capacity (device count) | między 1 a 32, ponad 160K, do 120K, do 128, do 160K, do 20K, do 256, do 4096, do 512, do 60K, do 64, do 96 |
| Network size (nodes) | między 1 a 32, mere end 128, do 128, do 64 |

### Electrical

| | |
|---|---|
| Power supply type | VDC |

### Zone

| | |
|---|---|
| Maximum zone capacity | między 1 a 64, ponad 1024, do 1024, do 256 |

### Physical

| | |
|---|---|
| Form factor | Stor |
| Mounting type | I kabinettet |

### Regulatory

| | |
|---|---|
| Compliancy | CE, REACH, RoHS 3, WEEE |
| Certification | CPR |

Als een bedrijf van innovatie behoudt Kidde Global Solutions zich het recht voor productspecificaties zonder kennisgeving te wijzigen. Ga voor de nieuwste productspecificaties online naar be.firesecurityproducts.com of neem contact op met uw verkoopvertegenwoordiger.

Last updated on 12 November 2026 - 18:57